

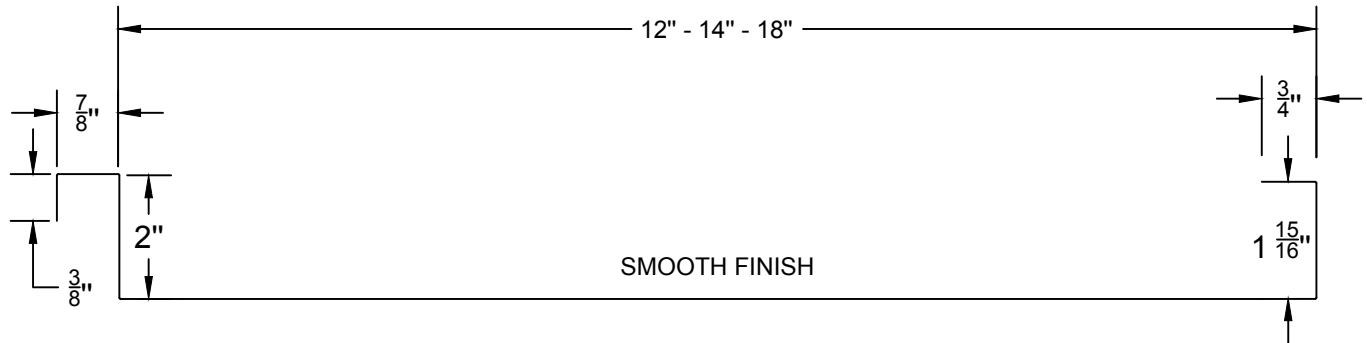


TALON SEAM 2000 2" HIGH DOUBLE LOCK INTEGRAL PANEL / TS 2000

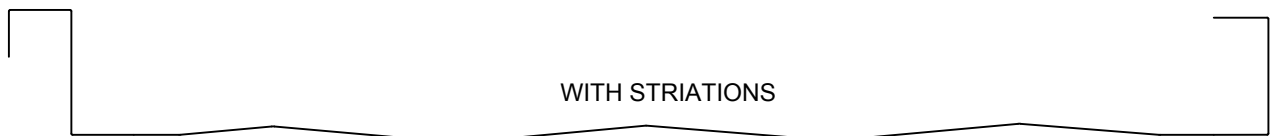

Note: TS 2000 A HAS EXTRA $\frac{3}{8}$ " LEG FOR ADDED STRENGTH

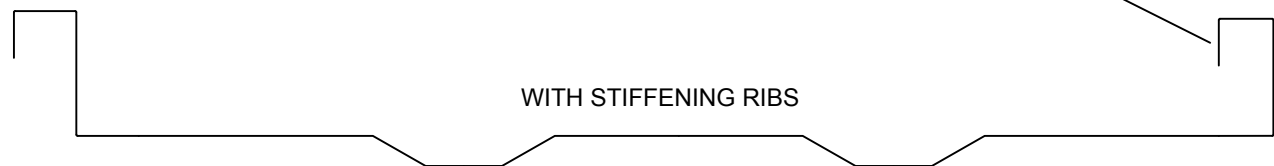


TS 2000 A AVAILABLE WITH STIFFENING RIBS OR STRIATIONS

BEFORE SEAM:
TS 2000

BEFORE SEAM:
TS 2000A

SINGLE LOCK:
TS 2000 & TS 2000A


DOUBLE LOCK:
TS 2000 & TS 2000A

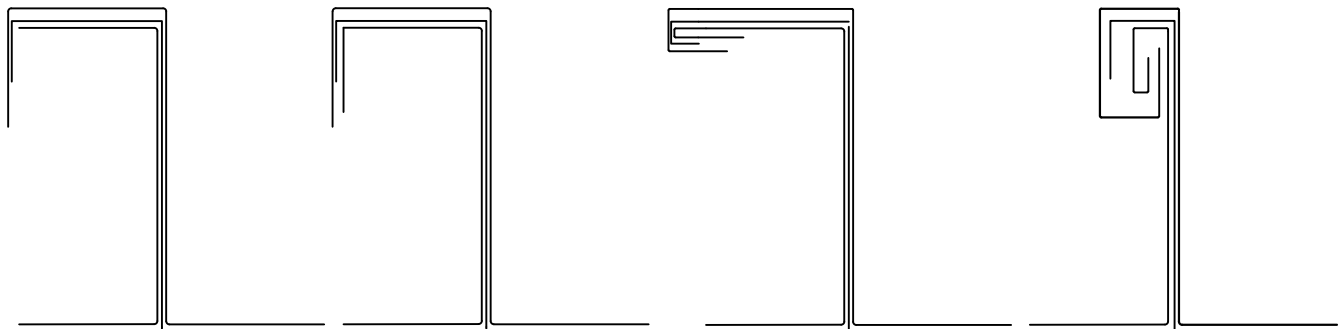

Tested in Accordance with:
 ASTM E 1592-95 STRUCTURAL LOAD CAPACITY
 ASTM E 1680-95 AIR LEAKAGE TEST
 ASTM E 1646-95 WATER PENETRATION TEST

Note:

-Oil Canning is not a cause for rejection. Using Stiffening Ribs or Striations can help reduce oil canning but will not completely eliminate it

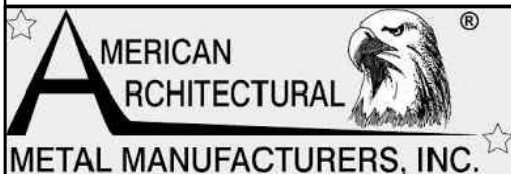

**AMERICAN ARCHITECTURAL
 METAL MANUFACTURERS, INC.
 EAGLE METAL ROOFING
 SYSTEMS TALON LOK® PANEL
 SPECIFICATIONS**

**TS 2000 & 2000 A 2" HIGH
 DOUBLE LOCK PANEL**